


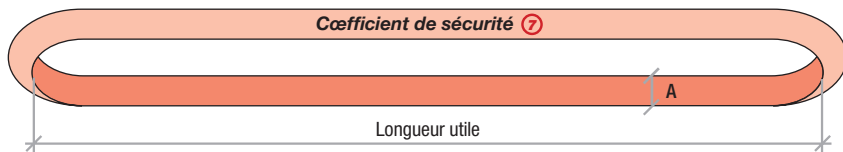



4503.

Optima : 1 à 30t

Optima XL : 40 à 60t

Coefficient de sécurité **7**



		CMU en kg selon configuration d'élingage				
Référence	Élingue Largeur A en mm					
		Direct	Berceau	Nœud coulant	0 à 45°	46 à 60°
Optima						
4503 0010	45	1 000	2 000	800	1 400	1 000
4503 0020	50	2 000	4 000	1 600	2 800	2 000
4503 0030	70	3 000	6 000	2 400	4 200	3 000
4503 0040	70	4 000	8 000	3 200	5 600	4 000
4503 0050	75	5 000	10 000	4 000	7 000	5 000
4503 0060	80	6 000	12 000	4 800	8 400	6 000
4503 0080	95	8 000	16 000	6 400	11 200	8 000
4503 0100	110	10 000	20 000	8 000	14 000	10 000
4503 0120	110	12 000	24 000	9 600	16 800	12 000
4503 0150	150	15 000	30 000	12 000	21 000	15 000
4503 0200	170	20 000	40 000	16 000	28 000	20 000
4503 0250	170	25 000	50 000	20 000	35 000	25 000
4503 0300	210	30 000	60 000	24 000	42 000	30 000
Optima XL						
4503 0400	200	40 000	80 000	32 000	56 000	40 000
4503 0500	200	50 000	100 000	40 000	70 000	50 000
4503 0600	230	60 000	120 000	48 000	84 000	60 000